










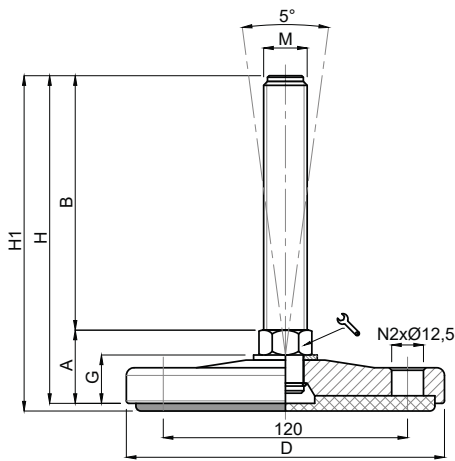

Embases acier massif

∅ 150

Embase acier
Tige acier
Pied articulé oscillant fixe



CODE		DÉSIGNATION	DIMENSIONS								CHARGE MAXI
Standard	avec semelle		A	B	D		M	G	H	H1	Newton
MA-15533	MA-15533/G	M20x75	25	75	150	20 	M20	16	100	103	45 000
MA-15534	MA-15534/G	M20x125	25	125	150	20 	M20	16	150	153	45 000
MA-15535	MA-15535/G	M20x175	25	175	150	20 	M20	16	200	203	45 000
MA-15536	MA-15536/G	M24x100	25	100	150	24 	M24	16	125	128	50 000
MA-15537*	MA-15537/G*	M24x150	25	150	150	24 	M24	16	175	178	50 000
MA-15538*	MA-15538/G*	M24x200	25	200	150	24 	M24	16	225	228	50 000
MA-15539	MA-15539/G	M30x125	26	125	150	30 	M30	16	151	154	50 000
MA-15540*	MA-15540/G*	M30x175	26	175	150	30 	M30	16	201	204	50 000
MA-15541*	MA-15541/G*	M30x225	26	225	150	30 	M30	16	251	254	50 000

* Référence disponible au pas fin (code + P2)

matière

Embase en acier zingué C40.
Tige en acier zingué livrée sans écrou.
Semelle en caoutchouc NBR dureté 70° shore H6 (80° sur demande).

note

Réalisation de dimensions et finitions spéciales de tiges filetées dès 100 pièces.

